



DOUBLE GAS PLUG™ STAINLESS STEEL



Model G0101-DBL-SS



Model G0101-2#DBL-SS

- WEATHER DURABLE BRUSHED STAINLESS STEEL ENCLOSURE
- DIRECT CONNECTION TO EXISTING LOW PRESSURE OR 2# RESIDENTIAL GAS SYSTEMS FOR INDOOR/OUTDOOR USE
- THERMAL VALVE SHUTS OFF GAS FLOW IN CONDITIONS OF 300°F OR MORE
- ALSO AVAILABLE WITHOUT 90° ELBOW FOR BOTTOM INLET CONNECTION
- CLEAN, COMPACT DESIGN, CONCEALS UNSIGHTLY PIPES AND VALVES
- 2-3/8" KWIK DISCONNECT SAFETY SHUT-OFFS WITH EASY ACCESS
- C/W ADJUSTABLE STANDOFFS FOR SIDING INSTALLATIONS

THE IDEAL METHOD OF CONNECTING MULTIPLE BARBEQUES, PATIO HEATERS, ETC. THIS UNIT IS THE ULTIMATE IN AN OUTDOOR GAS CONNECTION DESIGNED WITH A 1/2" INLET TO PROVIDE AMPLE CAPACITY TO SERVICE ALL YOUR OUTDOOR APPLIANCES.

SPECIFICATIONS



Capacity: 60,000 BTU (NG) each side
90,000 BTU (LP) each side

Inlet Connection: 1/2" NPT Rear/Bottom

Hose Connection: (2)- 3/8" Kwik Disconnect


Overall Size: G0101-DBL-SS - 8 1/2" x 5 1/4" x 2 1/8"
G0101-2#DBL-SS - 8 1/2" x 5 1/4" x 3 1/4"

Approved for temperatures to -40 deg.



2190-580 Nicola Ave, Port Coquitlam, B.C. V3B 0P2
TEL: (604) 877-1599 • FX: (604) 875-6776
EMAIL: info@bbymfg.com • WEB: www.bbymfg.com

**WHY FILL UP
WHEN YOU
CAN HOOK UP**

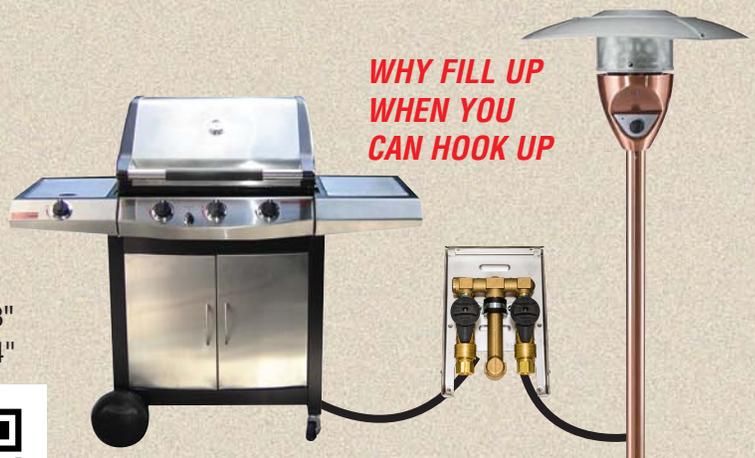

Distributed by: